




Electrical specifications

Max. switching voltage / Max. switched current:	230 V AC, 230 V DC / 2 A
Max. switching capacity:	10 W
Connector plug:	DIN EN 175301-803 Type C
Protection class:	IP 65
Cable gland:	PG 7, for cable-Ø from 6 to 7 mm
Cable cross-section:	2 x 1,5 mm ²

Normally open (NO)



Normally closed (NC)

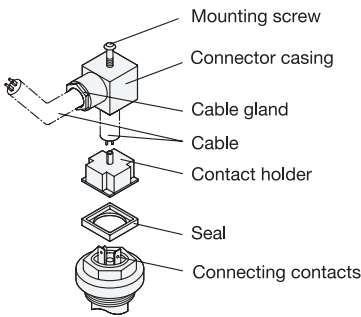

Assembly sequence for cable connection

1. Loosen the mounting screw and pull off the connector plug.
2. Push the contact holder out off the connector casing.
3. Loosen the cable gland, feed the cable through the connector casing and connect to the contact holder.
4. Push the contact holder back into the connector casing and tighten the cable gland for strain relief grip / seal.
5. Push the connector plug over the connecting contacts of the float switch and secure with mounting screw.


Assembly instruction

To change the type of contact (NO or NC), loosen the knurled screw and pull out the float rod. The switching magnet can now be placed in the recess on the opposite side, with the effect that the type of contact changes.

Each housing carries a label which explains this mode of function.

Installation position for normally closed (NC)
Contact opens, when the oil is below the MIN level

Installation position for normally open (NO)
Contact closes, when the oil is below the MIN level

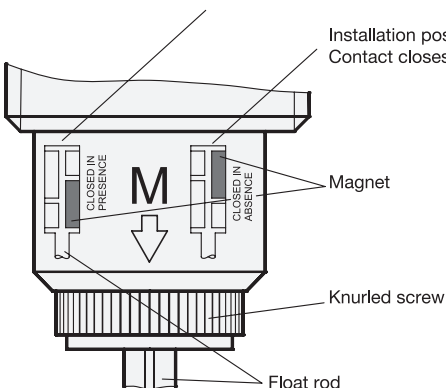

3.1
3.2
3.3
3.4
3.5
3.6
3.7
3.8
3.9

