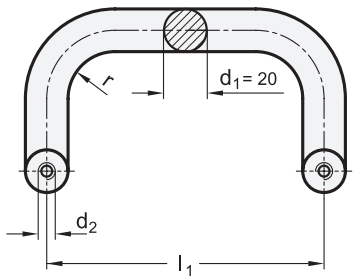





Inox
Stainless
Steel

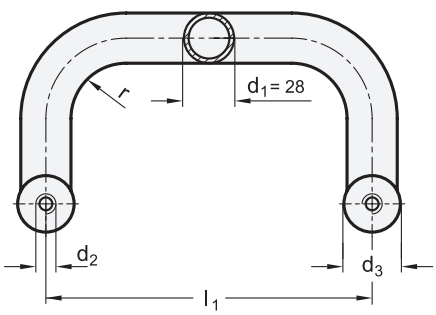

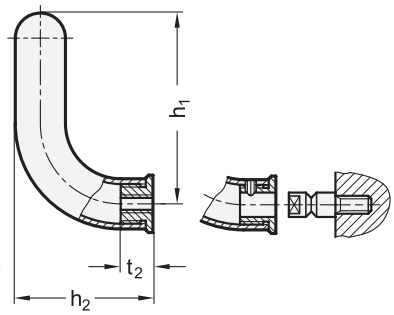

3 Type

A Mounting from the back (threaded blind bore)

B Mounting from the operator's side

1 d_1	2 l_1 ±0,5 Type A	±0,3 Type B Threaded bore for mounting stud	d_2	d_3	h_1	h_2	l_2	r	t_1	t_2
20	200	200	M 8	-	105	68	20	22	15	-
20	300	300	M 8	-	105	68	20	22	15	-
28	250	250	M 10	32	128	90	20	32	-	17
28	350	350	M 10	32	128	90	20	32	-	17
28	500	500	M 10	32	128	90	20	32	-	17

Specification

- Stainless steel AISI 304
  d_1 = 20: solid material
  d_1 = 28: tube Ø 28 x 2
  Matte shot-blasted
- Threaded bushing / Mounting stud
  Stainless steel AISI 303
- Grub screw (Type B)
  d_1 = 20: DIN 914-M5-6-NI
  d_1 = 28: DIN 914-M6-8-NI
- *Load Rating Information* → *Page 2106*
- *Stainless Steel Characteristics* → *Page 2166*
- RoHS

Information

Cabinet U-handles GN 426.6 can be mounted from the back (Type A) as well as from the operator's side (Type B). In this case the stud is first screwed in from the machine side and then the handle is pushed on and secured with the grub screw.

Both mounting methods allow the mounting of a pair of handles in opposite position. This method could be used e.g. on doors (double handle). In general, a mounting stud with special length l_2 might be required.

see also...
- *Cabinet U-Handles GN 425.1 (Ø 8 / 10 / 12, Aluminum / Stainless Steel, Angled)* → *Page 153*

How to order

GN 426.6-20-300-A

1	d_1
2	l_1
3	Type