


Description of function, operation	
	<p>The rotary toggle latch is first unlocked with the key. When the T-handle is then folded out, the latch arm executes a 5 mm linear stroke and lifts off of the frame.</p>
	<p>By rotating the T-handle 90°, the latch arm moves into open position.</p>
	<p>In this position, doors and covers can be opened and closed.</p>
	<p>Rotating the T-handle another 90° moves the latch arm back into lock position.</p> <p>Folding down the T-handle causes the latch arm to execute a linear stroke that draws the latch arm against the frame.</p> <p>In this position, the rotary toggle latch can be locked with the key or an additional padlock as needed.</p>

### Installation opening

The installation opening must be designed according to the dimensions given in the sketch.

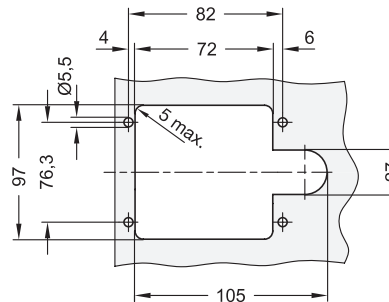

3.1  
3.2  
3.3  
3.4  
3.5  
3.6  
3.7  
3.8  
3.9

