Stainless Steel-Distance bushings

for indexing plungers / cam action indexing plungers assembly



Examples of application

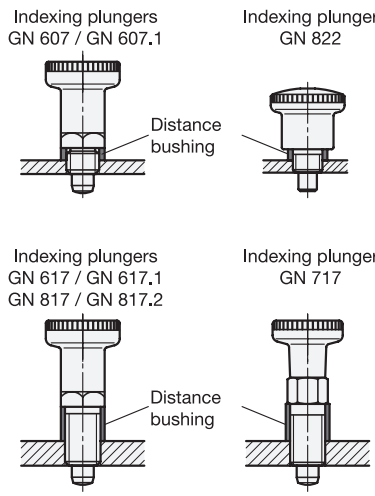

Inox
Stainless
Steel

1 d_1 H12	2 d_2 –0,1	3 Length l ±0,1							for indexing plungers / mini indexing plungers with thread-Ø														
										GN 414 GN 414.1	GN 514	GN 607 GN 607.1	GN 612.8	GN 617 GN 617.1 GN 617.2	GN 672	GN 717	GN 816 GN 816.1	GN 817 GN 817.2	GN 817.4	GN 817.8	GN 822 GN 822.1 GN 822.6 GN 822.7	GN 7336.8
6	7	2	4	6	8	-	-	-	M 6	-	-	-	-	-	-	x	-	-	-	-	-	-
8	10	2	4	6	8	10	-	-	M 8	-	-	-	-	-	-	x	-	x	-	-	x	-
10	12	2	4	6	8	10	12	-	M 10	-	-	-	-	x	-	x	-	x	-	-	x	-
12	14	2	4	6	8	10	12	14	M 12	-	x	-	x	x	x	x	x	x	x	x	x	-
12	17	2	4	5	6	8	10	12	M 12	x	-	x	-	-	-	-	-	-	-	-	-	-
16	17	2	4	6	8	10	12	-	M 16	-	x	-	-	-	-	x	x	x	x	x	x	-
16	19	2	4	6	8	10	12	-	M 16	x	-	x	x	x	x	-	-	-	-	-	-	x
20	22	6	8	10	12	14	16	18	M 20	-	-	-	x	x	-	-	-	x	x	x	-	-

Specification

- Stainless Steel AISI 303
- *ISO-Fundamental tolerances → Page 1479*
- *Stainless Steel characteristics → Page 1489*
- RoHS

Information

Stainless Steel-Distance bushings GN 609.5 compensate for the body thread lengths on the indexing plungers to allow mounting through walls of varying thickness.

How to order		
GN 609.5-16-17-4	1	d_1
	2	d_2
	3	Length l