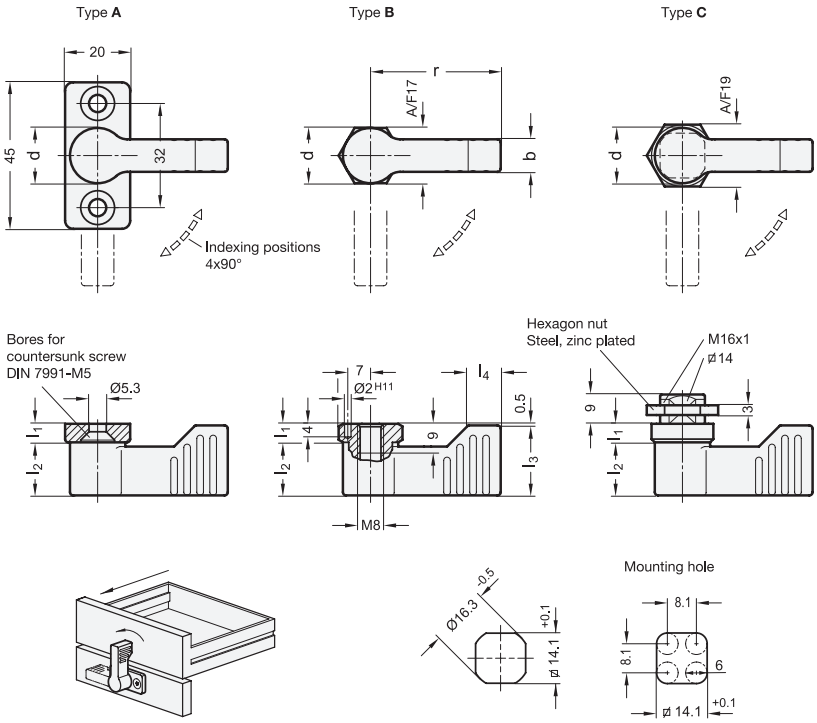

3 Type

A With flange for surface mounting
B With female thread
C With male thread

1 d	2 r	b	l_1 ≈	l_2	l_3 min.	l_4
17	40	10	5,5	16,5	21,5	11
17	55	10	5,5	16,5	21,5	11

Specification

4

- Latch
  Zinc die casting
  Powder coated
  Black, RAL 9005, textured finish **SW**
  Red, RAL 3000, textured finish **RS**
- Indexing mechanism
  - Type A
    Zinc die casting / Plastic
  - Type B / Type C
    Steel / Plastic
    Steel parts zinc plated, blue passivated
- Fastening flange
  Zinc die casting
  Powder coated
  Black, matte finish
- RoHS

Information

Stop locks GN 702 are particularly suitable for light-weight applications not exposed to dynamic loads, e.g. for keeping drawers closed.

To mount stop locks of Type C, bore holes as shown in the diagram below must be set in the attachment surface.

These mounting holes are usually made by punching or with laser. For small series and steel sheets below 2 mm thickness, the sheet metal punches GN 123 are the tool of choice → *Page 1267*.

The mounting bore holes can also be made by drilling / milling.

How to order

1 2 3 4
GN 702-17-40-C-SW

1	d
2	r
3	Type
4	Color