



Slotted hole for key ring (ball chain)



Balls locked

Marking for material
AISI 630 (GN 113.12)

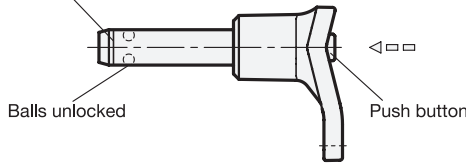

Balls unlocked

Push button



Inox
Stainless
Steel



d_1 -0,04 -0,08	$l_1 +0,6$		d_2	d_3	d_4	$l_2 \pm 1$	l_3	l_4	Location bore H11													
5	10	15	20	25	30	35	40	45	50	60	70	80	-	-	-	5,5	17,5	13,5	6	26,5	33	5
6	10	15	20	25	30	35	40	45	50	60	70	80	-	-	-	7	17,5	13,5	7	26,5	33	6
8	10	15	20	25	30	35	40	45	50	60	70	80	90	100	-	9,5	23	18	8,2	34	43,5	8
10	15	20	25	30	35	40	45	50	60	70	80	90	100	110	120	12	23	18	9,6	34	43,5	10
12	20	25	30	35	40	45	50	60	70	80	90	100	110	120	-	14,5	30,5	24	10,6	40,5	58	12
16	30	35	40	45	50	60	70	80	90	100	110	120	130	140	150	19	30,5	24	14	40,5	58	16
20	50	60	70	80	90	100	110	120	130	140	150	-	-	-	-	25	40,5	33	20,5	51,5	72,5	20
25	50	60	70	80	90	100	110	120	130	140	150	-	-	-	-	30,8	40,5	33	22	51,5	72,5	25

Specification

- GN 113.11**
Pin stainless steel AISI 303
- GN 113.12**
Pin stainless steel AISI 630
Precipitation-hardened
- L-Handle
Plastic (Polyamide PA), black
Temperature resistant up to 80 °C
- Balls
Stainless steel AISI 420C
- Pressure spring
Stainless steel, German Material No. 1.4565
- Load Capacity → Page 2131
- ISO Fundamental Tolerances → Page 2151
- Stainless Steel Characteristics → Page 2166
- RoHS

Accessory

- Ball Chains GN 111 / GN 111.5 → Page 1174
- Retaining Cables GN 111.2 → Page 1176
- Spiral Retaining Cables GN 111.4
→ Page 1175

Information

Ball lock pins GN 113.11 / GN 113.12 are used for quick fixing, connecting and locking of various parts and workpieces. A typical application is locating pins which have often to be removed and installed again.

By pressing the spring loaded push button both balls are unlocked and by releasing it, the balls are locked again.

Ball lock pins GN 113.12 have an extreme load capacity, the pin is made of heavy duty, hardened and highly abrasion-resistant stainless steel.

The technical appendix contains the load capacities for the double-sided shearing resistance (breaking strength).

see also...

- List of Lock Pin Types → Page 1008 ff.
- Guide Bushings DIN 172 (with Collar) → Page 1112
- Guide Bushings DIN 179 (without Collar) → Page 1112

How to order (Stainless steel AISI 303)	1	d_1
GN 113.11-8-25	2	l_1

How to order (Stainless steel AISI 630)	1	d_1
GN 113.12-16-50	2	l_1

3.1
3.2
3.3
3.4
3.5
3.6
3.7
3.8
3.9

