


1 Type

- SG** With star knob
- DK** With triangular spindle
- VK7** With square spindle
- VK8** With square spindle
- VDE** With double bit

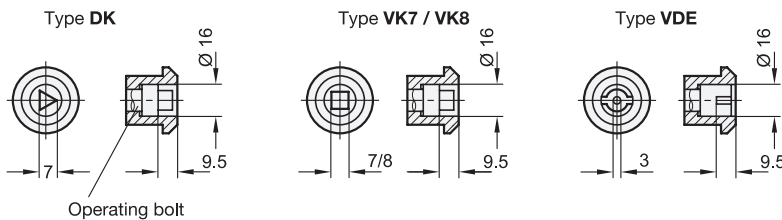

2

Clamping range **A1...A9** (Door thickness + door frame thickness)

A 1 (l = 35)	A 2 (l = 40)	A 3 (l = 45)	A 4 (l = 50)	A 5 (l = 55)	A 6 (l = 60)	A 7 (l = 65)	A 8 (l = 70)	A 9 (l = 75)
17 - 25	22 - 30	27 - 35	32 - 40	37 - 45	42 - 50	47 - 55	52 - 60	57 - 65

Specification

- Lock housing / Operating bolt
Zinc die casting, chrome plated
- Cam latch
Sheet steel zinc plated, blue passivated
- Distance piece
Aluminum
- Star knobs GN 5337.2
Plastic (Polypropylene PP)
Black, matte finish
- *Plastic Characteristics* → Page 2158
- RoHS

Accessory

- Socket Keys GN 119.2 → Page 1266
- Protective Caps GN 120 → Page 1268
- Opening Handles GN 120.1 → Page 1269
- Sheet metal punches GN 123 → Page XYZ

Information

Latches GN 119 have a pulling-in range of 10 mm. Locking is achieved by turning the latch clockwise.

see also...

- *List of Latch Types* → Page 1196 ff.
- *Latches GN 119 (Stainless Steel)* → Page 1242
- *Latches GN 117* → Page 1238
- *Latches GN 118* → Page 1244
- *Latches with Cabinet U-Handle GN 119.3* → Page 1246

How to order

GN 119-VK8-A3

1 Type

2 Clamping range A