


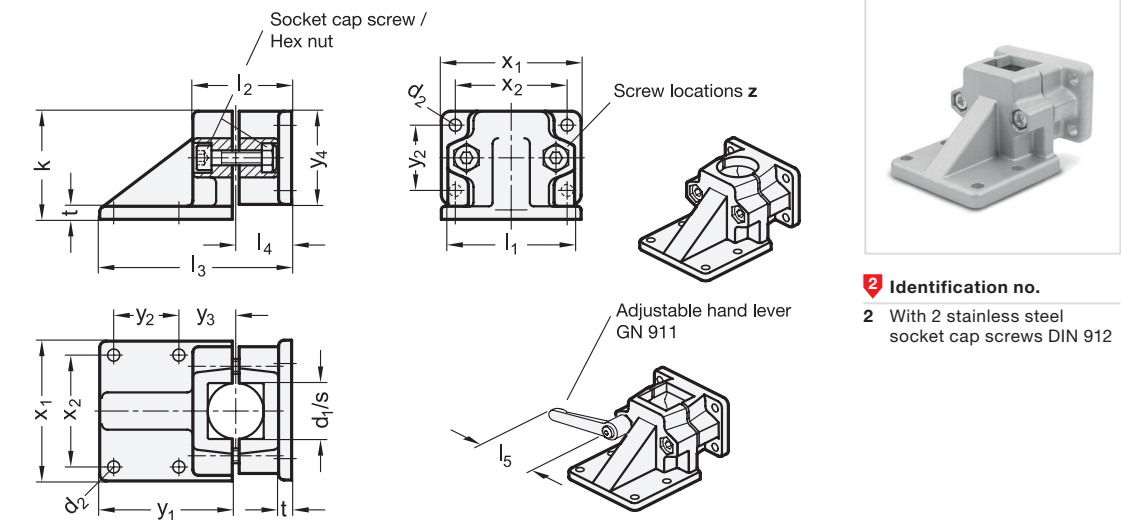

1

1

d ₁ Bore	s Square	d ₂	k Clamping length	l ₁	l ₂	l ₃	l ₄	t	x ₁	x ₂	y ₁	y ₂	y ₃	y ₄	z Screw locations	Accessory Recom. hand lever GN 911 for z l ₅
B 20	V 20	7	58	69	53	103	30	7	75	60	72	35	30	50	M8-40	63 78
B 25	V 25	7	58	69	53	103	30	7	75	60	72	35	30	50	M8-40	63 78
B 30	V 30	7	58	69	53	103	30	7	75	60	72	35	30	50	M8-40	63 78
B 40	V 40	11	91	98	82	156	46,5	14	115	90	108	50	45	76	M10-65	78 92
B 42	-	11	91	98	82	156	46,5	14	115	90	108	50	45	76	M10-65	78 92
B 45	V 45	11	91	98	82	156	46,5	14	115	90	108	50	45	76	M10-65	78 92
B 48	-	11	91	98	82	156	46,5	14	115	90	108	50	45	76	M10-65	78 92
B 50	V 50	11	91	98	82	156	46,5	14	115	90	108	50	45	76	M10-65	78 92
B 60	V 60	11	100	108,5	97	186	56	14	125	100	128	52	65,5	90	M10-80	- -

Specification

3

1

1

- Aluminum
 - Powder coated
 - Black, RAL 9005, textured finish
 - Plain finish, matte shot-blasted
- Socket cap screws DIN 912
 - Stainless steel AISI 304
- Hex nuts DIN 985
 - Stainless steel AISI 304
 - Self-locking via polyamide ring
- Stainless Steel Characteristics → Page 2166
- RoHS

How to order

1

2

3

GN 171-B45-2-BL

1

d₁ (s)

2

Identification no.

3

Finish

1

2

3

1 Aluminum

- Powder coated
 - Black, RAL 9005, textured finish
 - Plain finish, matte shot-blasted

2 Socket cap screws DIN 912

- Stainless steel AISI 304

3 Hex nuts DIN 985

- Stainless steel AISI 304
- Self-locking via polyamide ring

- Accessory
- Construction Tubes GN 990 → Page 1835

• Adjustable Hand Levers GN 911

→ Page 1784