


Mounting example

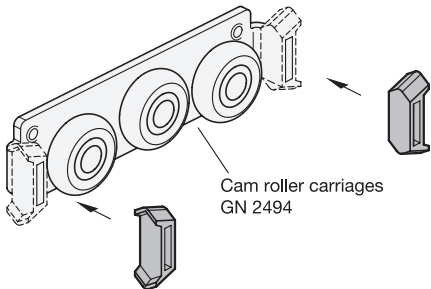

- 2

Type
- 3

Coding
- K

Compact design
- X

For fixed bearing guide rail

1

h ₁ Cam roller linear guide rails GN 2492	b	h ₂	l ₁	l ₂
30	8	10	8	3
45	12,5	20	11	4

Specification

- Wipers
Polyurethane (TPU)
Blue, FDA compliant
- Operating temperature -20 °C to 100 °C
- Plastic Characteristics → Page XYZ
- RoHS

Information

Wipers GN 2498 protect against dirt deposits in cam roller linear guide rails GN 2492 and cam rollers GN 2496.

The wipers are provided as a replacement part for cam roller carriage GN 2494 to allow easy exchange in case of wear. Alternatively, they can be used on custom-built cam roller carriages. Based on the dimensions of the rectangular cutout designated for fastening them to the cam roller carriage.

The material can also be used in special environments that can be found, for example, in the pharmaceutical and food processing industries.

The wipers can be manually pushed onto the provided retaining tabs on the cam roller carriages and prepositioned. When inserting the carriage into the guide rail, check the position and adjust if necessary. The wipers will automatically assume proper alignment during operation.

- see also...
- Assembly and Technical Instructions (for Linear Guide Rail Systems) → Page XYZ
 - Linear Guide Rail Systems GN 1490 (Steel / Stainless Steel) → Page QVX
 - Wipers GN 2428 → Page QVX

How to order	1 h ₁
GN2498-30-K-X	2 Type
	3 Coding