



Assembly examples

Application example




Flat hexagon nut GN 909



Mounting block GN 412.1

Positioning bushings
GN 412.2 / GN 412.4

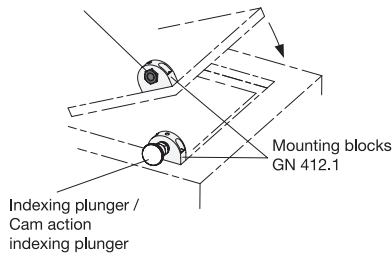

Mounting blocks
GN 412.1

Indexing plunger /
Cam action
indexing plunger

d₁	d₂ +0,1 Bore	d₃ -0,05	l₁ -0,2	l₂	A/F
M 12 x 1,5	B 4,2	12	10	13	13
M 12 x 1,5	B 5,2	12	10	13	13
M 12 x 1,5	B 6,2	12	10	13	13
M 16 x 1,5	B 8,2	16	12	15	17
M 16 x 1,5	B 10,2	16	12	15	17
M 16 x 1,5	B 12,2	16	12	15	17

Specification

GN 412.2

- Steel
- Hardened
- Blackened

GN 412.4

- Stainless Steel AISI 431
- Hardened

RoHS

Positioning bushings GN 412.2 / GN 412.4 are used in connection with bolts of indexing plungers and cam action indexing plungers. The threads are adapted to the mounting blocks GN 412.1 and GN 612.1.

see also...

	Page
GN 412.1 Mounting Blocks (Zinc Die Casting)	QVX
GN 612.1 Mounting Blocks	QVX

Technical Information

Stainless Steel Characteristics	QVX
---------------------------------	-----

Accessory

GN 909 Thin Hex Nuts (Steel)	QVX
GN 909.5 Thin Hex Nuts (Stainless Steel)	QVX

How to order (Steel)

GN 412.2-M12x1,5-B5,2	1	d ₁
	2	d ₂

How to order (Stainless Steel)

GN 412.4-M16x1,5-B10,2	1	d ₁
	2	d ₂

