


ROSTFREI  
Inox  
Stainless  
Steel

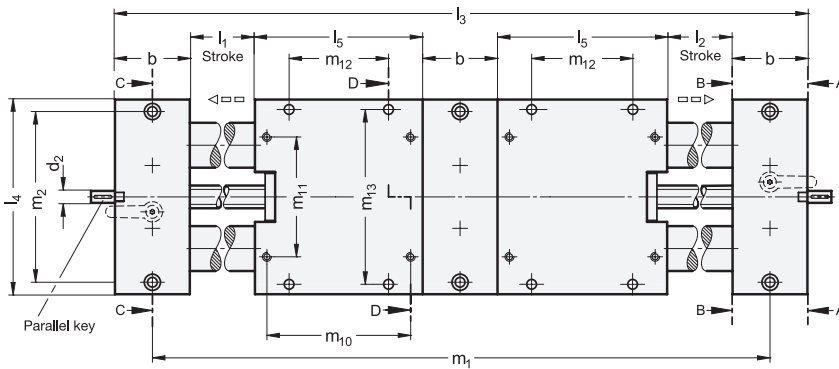


- 5 8** **Thread direction spindle 1 / spindle 2**
- RH** Right hand thread for journal 1, Left hand thread for journal 2
  - RHK** Right hand thread for journal 1, Left hand thread for journal 2, with spindle clamping via shaft collar and hand lever
  - LH** Left hand thread for journal 1, Right hand thread for journal 2
  - LHK** Left hand thread for journal 1, Right hand thread for journal 2, with spindle clamping via shaft collar and hand lever

<b>1</b>	<b>3</b>	<b>4</b>	$d_1$	$l_1$ Stroke 1 max.	$l_2$ Stroke 2 max.	$b$	$d_2$	$d_3$	$d_4$	$d_5$	$d_6$	For screw DIN 912	$d_7$	$d_8$	For screw DIN 912	$d_9$	$d_{10}$	For screw DIN 912
			25	750	750	50	8	M 6	M 6	6,1	10,5	M 6	5,5	10	M 5	6,6	11	M 6
			40	1030	1030	60	12	M 8	M 8	8,4	13,5	M 8	6,6	11	M 6	8,6	13,5	M 8

$d_1$	$h_1$	$h_2$	$h_3$	$h_4$	$l_3$ Total length	$l_4$	$l_5$	$m_1$	$m_2$	$m_3$	$m_4$
25	52	64	2	27	$3xb+2xl_5+l_1+l_2$	130	130	$2xb+2xl_5+l_1+l_2$	114	97	30
40	60	75	3	31,5	$3xb+2xl_5+l_1+l_2$	180	180	$2xb+2xl_5+l_1+l_2$	160	138	39

$d_1$	$m_5$	$m_6$	$m_7$	$m_8$	$m_9$	$m_{10}$	$m_{11}$	$m_{12}$	$m_{13}$	Parallel key DIN 6885
25	35	30	42	9,5	12	114	80	80	114	A2x2x12
40	38	39	52	12,5	12	160	120	120	160	A4x4x12

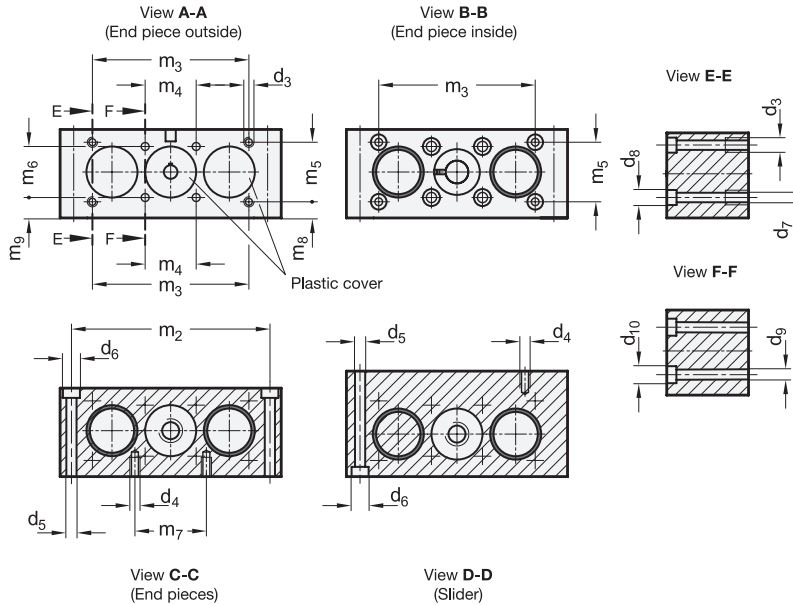

## Specification

- Double solid shaft roller guide
  - Steel CF53 ground, hard chrome plated **3ST**
  - Stainless steel, ground, inductively hardened **3NI**
- Ball screw drive, ball bearing
- End piece / slider
  - Aluminum
  - All surfaces machined, plain finish
- Positioning accuracy
  - $\pm 0.05$  mm / 300 mm stroke
- *Stainless Steel Characteristics*  
 → *Main catalogue Page 2166*
- RoHS



## Information

The round guides of the precision double tube linear actuators GN 6962 are made of hard chrome plated steel or ground stainless steel solid shafts. The aluminum end pieces connect the solid shafts and form a precise linear guide together with the slider. Two independent recirculating ball screws are installed in the center. The thread direction of the spindles can be chosen independently for each side. The linear movement of the double sliders, which is independent of the opposite side, is driven by the ball screw nut affixed in the sliders.

Precision double tube linear actuators have high torsional stiffness and can accept high weights and torques, since the load is introduced and distributed over a large surface area.

The overview shows a range of possible accessories that can be installed on the precision double tube linear actuator in the various configurations. The design and length of the journals vary depending on the accessories, which must be taken into consideration when selecting the linear actuator. The accessories are not included with the linear actuators and must be ordered separately. For this purpose, please refer to the design overview on page 68.

### see also...

- *Precision Double Tube Linear Actuators GN 6960* → Page 60
- *Double Tube Linear Actuators GN 4960* → Page 28

$d_1$	<b>6</b> Spindle pitch Spindle 1	<b>9</b> Spindle pitch Spindle 2	Journal diameter $d_2$	Journal length		
	Ball groove thread	Ball groove thread		$l_6$	$l_7$	$l_8$
25	5	5	8	16	52	16 ... 67
40	5	5	12	17	59	17 ... 74

**Overview accessories**


Handwheels <b>GN 9234</b>  Page 69	Position Indicators <b>GN 9034</b> Electronic counter Page 72

**Version - Journal 1**

<p><b>7</b> <b>B</b> Journal for handwheel</p>	<p><b>7</b> <b>D</b> Journal for position indicator and handwheel</p>
Journal length $l_6$	Journal length $l_7$
<p><b>7</b> <b>Gxx</b> Individual length with parallel key (for xx value from table column <math>l_8</math>)</p>	<p><b>7</b> <b>Hxx</b> Individual length without parallel key (for xx value from table column <math>l_8</math>)</p>
Journal length $l_8$	Journal length $l_8$

Version - Journal 2

<p><b>B</b> Journal for handwheel</p>	<p><b>D</b> Journal for position indicator and handwheel</p>
<p>Journal length <math>l_6</math></p>	<p>Journal length <math>l_7</math></p>
<p><b>Gxx</b> Individual length with parallel key (for xx value from table column <math>l_6</math>)</p>	<p><b>Hxx</b> Individual length without parallel key (for xx value from table column <math>l_6</math>)</p>
<p>Journal length <math>l_8</math></p>	<p>Journal length <math>l_8</math></p>

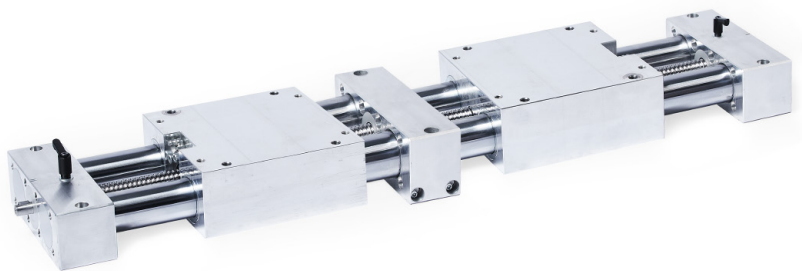

How to order

Standard section

Supplemental section

- 1
2
3
4
5
6
7
8
9
10

**GN 6962-40-3ST-980-1000-RH-5-D-LHK-5-B**

<b>1</b>	Outer diameter $d_1$	<b>5</b>	Thread direction of spindle 1	<b>9</b>	Spindle pitch 2
<b>2</b>	Material	<b>6</b>	Spindle pitch 1	<b>10</b>	Version journal 2
<b>3</b>	Stroke 1 $l_1$	<b>7</b>	Version journal 1		
<b>4</b>	Stroke 2 $l_2$	<b>8</b>	Thread direction of spindle 2		