Revolving Handles

Plastic / Aluminum / Stainless Steel, Mounting from the Back

Ganter Norm®

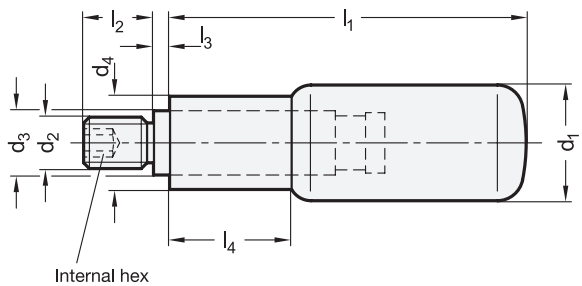

STAINLESS*

GN 798									
d_1	d_2			d_3	d_4	l_1	l_2	l_3 ≈	l_4
16	M 6	-	-	10	13	41,5	12	2,5	15
18	M 6	M 8	-	10	14,5	56	13	2,5	19
22	M 6	M 8	M 10	14	18,5	59	14	2,5	21
24	M 8	M 10	-	14	18,5	74	16	2,5	27
25	M 10	-	-	16	20	84	16	2,5	30

GN 798.1									
d_1		d_2		d_3	d_4	l_1	l_2	l_3 ≈	l_4
KT	NI								
16	-	M 6	-	10	13	41,5	12	2,5	15
18	18	M 6	M 8	10	14,5	56	13	2,5	19
22	22	M 8	M 10	14	18,5	59	14	2,5	21
24	24	M 8	M 10	14	18,5	74	16	2,5	27
25	-	M 10	-	16	20	84	16	2,5	30

Specification

GN 798
Handle
- Plastic Polyamide (PA) **KT**
  - Operating temperature up to 90 °C
  - Black, matte finish
- Aluminum **AL**
  Polished

Spindle
Steel
Zinc plated, blue passivated

GN 798.1
Handle
- Plastic Polyamide (PA) **KT**
  - Operating temperature up to 90 °C
  - Black, matte finish
- Stainless steel AISI 303 **NI**
  Fine turned, plain

Spindle
Stainless steel AISI 303

RoHS

The design of the revolving handles GN 798 / GN 798.1 is characterized by their shape, consisting of two cylinders. It gives the hand an excellent grip.

see also...	Page
GN 798.1 Revolving Handles (Spindle Stainless Steel)	QVX
GN 798.2 Revolving Handles (Spindle Steel, with Internal Thread)	QVX
GN 798.3 Retractable Handles (Retractable Mechanism Steel, with Hold in Both Positions)	QVX
GN 798.7 Safety Retractable Handles (Automatic Return to the Retracted Position)	QVX

Technical Information

Plastic Characteristics	QVX
Stainless Steel Characteristics	QVX

How to order (Spindle Steel)

GN 798-AL-24-M10

1	Material
2	d_1
3	d_2

How to order (Spindle stainless steel)

GN 798.1-NI-18-M6

1	Material
2	d_1
3	d_2