



Type ML

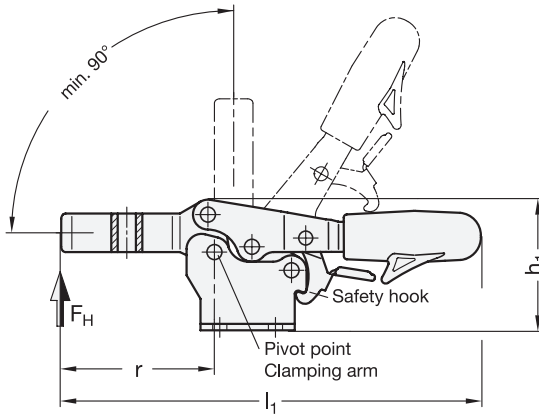

Type MLC




ROSTFREI  
Inox  
Stainless  
Steel

**2 Type**

- ML** Forked clamping arm, with two flanged washers
- MLC** Forked clamping arm, with two flanged washers and clamping screw GN 708.1
- OL** Solid clamping arm, with clasp for welding

**Operating principle**


Type OL

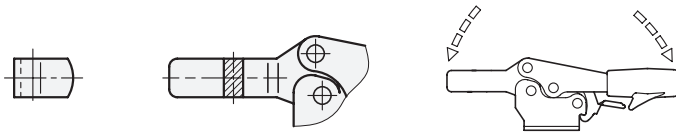

**1**

Size	Steel	Stainless steel	F <sub>H</sub> in N Holding capacity	a ≈	b <sub>1</sub>	b <sub>2</sub>	b <sub>3</sub>	d <sub>1</sub>	d <sub>2</sub>	h <sub>1</sub> ≈	h <sub>2</sub>	h <sub>3</sub>	h <sub>4</sub>	h <sub>5</sub> max.
75	75	75	900	20	28	26	5,3	M 5	4,5	37	20	11	19	5
130	130	130	1000	32	36	40	6,3	M 6	5,6	51	30,5	16	25,5	14
230	230	230	1700	37	44	44	8,5	M 8	6,6	61,5	36,5	18	30	12,5
355	-	-	1800	58	60	58	10,5	M 10	8,6	83	50	22	37	21,5
455	-	-	3200	65	70	65	12,5	M 12	8,7	99	60	26	43	27,5

Size	Steel	Stainless steel	l <sub>1</sub> ≈	l <sub>2</sub> ≈	l <sub>3</sub> ≈	l <sub>4</sub> max.	l <sub>5</sub>	m <sub>1</sub>	m <sub>2</sub>	m <sub>3</sub>	r	s <sub>1</sub>	s <sub>2</sub>	w Adjustable range
75	75	75	118	67	40	49,5	45	13,5	16	19	42,5	2	4	15
130	130	130	172	92,5	54	65	55	26	22,4	28,4	62,5	2,5	5	17,5
230	230	230	196	109	64,5	79	68	26	26	31,5	71,5	3	6	20
355	-	-	270	160	98,5	116	77	41	38,8	43	109	3,5	7	19
455	-	-	305	184	116	136	100	41,5	40	43	126	4	10	33

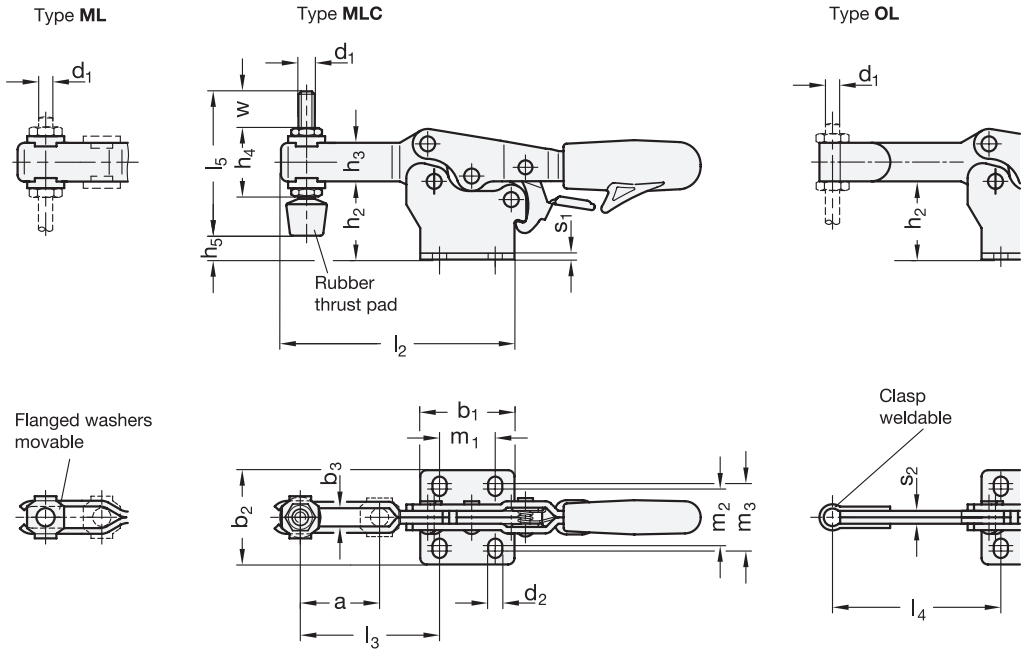

**Specification**

- Steel —
  - Case-hardened steel C10
  - Zinc plated, blue passivated
  - Bearing pins tempered
  - Bearing rivets (for size 355 and up) case-hardened
- Stainless steel AISI 304 **NI**
- All moving parts  
Lubricated with special grease
- Solid designed plastic handle  
Red, oil resistant
- Clamping screw GN 708.1, type A
  - Steel, zinc plated, blue passivated / Stainless steel AISI 304
  - Rubber thrust pad 85 Shore A
- *Stainless Steel Characteristics* → Page 2166
- **RoHS**

**Accessory**

- Clamping Screws → Page 810 ff.
- Holders for Clamping Screws GN 801 (for Type ML) → Page 815
- Clamping Arm Extenders GN 801.1 (for Type ML) → Page 816
- Clamping Arm Extenders GN 801.2 (for Type ML) → Page 817
- Clamping Arm Extenders GN 809.1 (for Type OL) → Page 819

**Information**

Toggle clamps GN 820.3 have a safety function whereby, during closing, a spring loaded safety hook latch ensures a secure locking connection. It prevents the inadvertent unlocking of the clamp due to vibrations or an accidental attempt of loosening / opening of the clamp. To open and release the clamp, pull up on the finger grip to disengage the safety hook latch mechanism (one hand operation).

They work according to the toggle principle: lever and clamping bar move in the opposite direction. They require less space for the clamping action.

Toggle clamps in the with forked clamping arm, with two flanged washers (type ML) can accommodate an application specific clamping screw. A clamping screw with neoprene rubber tip is also included for type MLC.

Toggle clamps in the type OL version can either be utilized by welding the clasp which can then accommodate an application specific hold-down fastener component.

see also...

- *General Information for Toggle Clamps* → Page 698

How to order (Steel)

**GN 820.3-355-ML**

- 1 Size
- 2 Type

How to order (Stainless steel)

**GN 820.3-75-OL-NI**

- 1 Size
- 2 Type
- 3 Material

1.1  
1.2  
1.3  
1.4  
2.1  
2.2  
2.3  
2.4

