Adjustable Clamping Levers

Steel, with Internal Thread, Push to Disengage

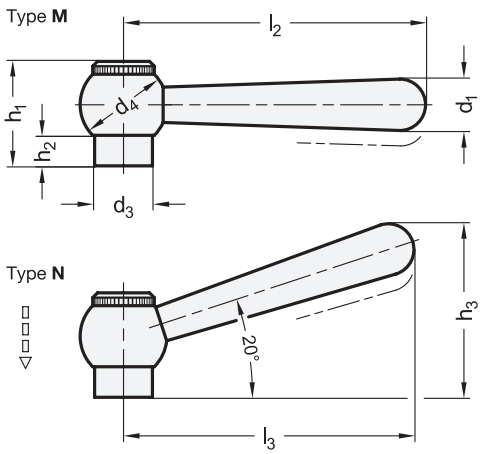



3 Type

M Straight lever
N Angled lever

1 d_1	2 d_2		d_3	d_4	h_1	h_2	h_3 ≈	l_2	l_3 ≈	t min.
10	M 6	M 8	13,5	20	25	8	39,5	63	60	12
13	M 8	M 10	16	25	29	8	49,5	80	76	15
16	M 10	M 12	19	28	33,5	10,5	60,5	100	95	18

Specification

Hub / Shaft
Steel, blackened

Insert
Steel, blackened

RoHS

Adjustable clamping levers GN 99.2 are known for their small dimensions. They are for use in applications where either the clamping range is limited or where a specific lever position is required. The serrated bore in the spherical hub is fitted with a insert which engages in the hub with its own serrations.
By depressing the clamping lever the serrations are disengaged freeing it for re-positioning in the most convenient position. When releasing the lever the serrations will re-engage automatically.
Should a rotation of 360° not be possible the insert can be slightly screwed in (after the lever has been disengaged) by means of the slotted knurled screw.

see also...	Page
DIN 99 Clamping Levers (Steel / Stainless Steel, not movable)	QVX

How to order

GN 99.2-16-M12-N (1 2 3)

1	d_1
2	d_2
3	Type